


加热管电阻箱(JRA) Heating Pipe Resistor Assemblies


■ 产品概述 (Product Introduction)

JRA加热管电阻箱的绕线电阻器采用不锈钢管外包，外形美观。该电阻具有耐气候性、耐振动、散热快，防护等级高等特点，安全性优于传统瓷骨架电阻器。该电阻器是用一种耐高温的有机硅树脂和硅粉作基本材料封装的功率型绕线电阻，易紧密安装，易附加散热器。作为制动电阻保护变频器、伺服等不受电机再生电能的危害。电力电子负载测试中做为阻性负载。

JRA is wrapped in stainless steel tubes and have a beautiful appearance. It has the characteristics of weather resistance, vibration resistance, fast heat dissipation, high protection level, etc., and is safer than traditional porcelain skeleton resistors. It is a power wire-wound resistor encapsulated with a high-temperature resistant silicone resin and silicon powder as basic materials. It is easy to install tightly and attach a heat sink. As a braking resistor, it protects the converter, servo, etc. from the harm caused by the regenerated electric energy of the motor. It is used as a resistive load in power electronic load tests.

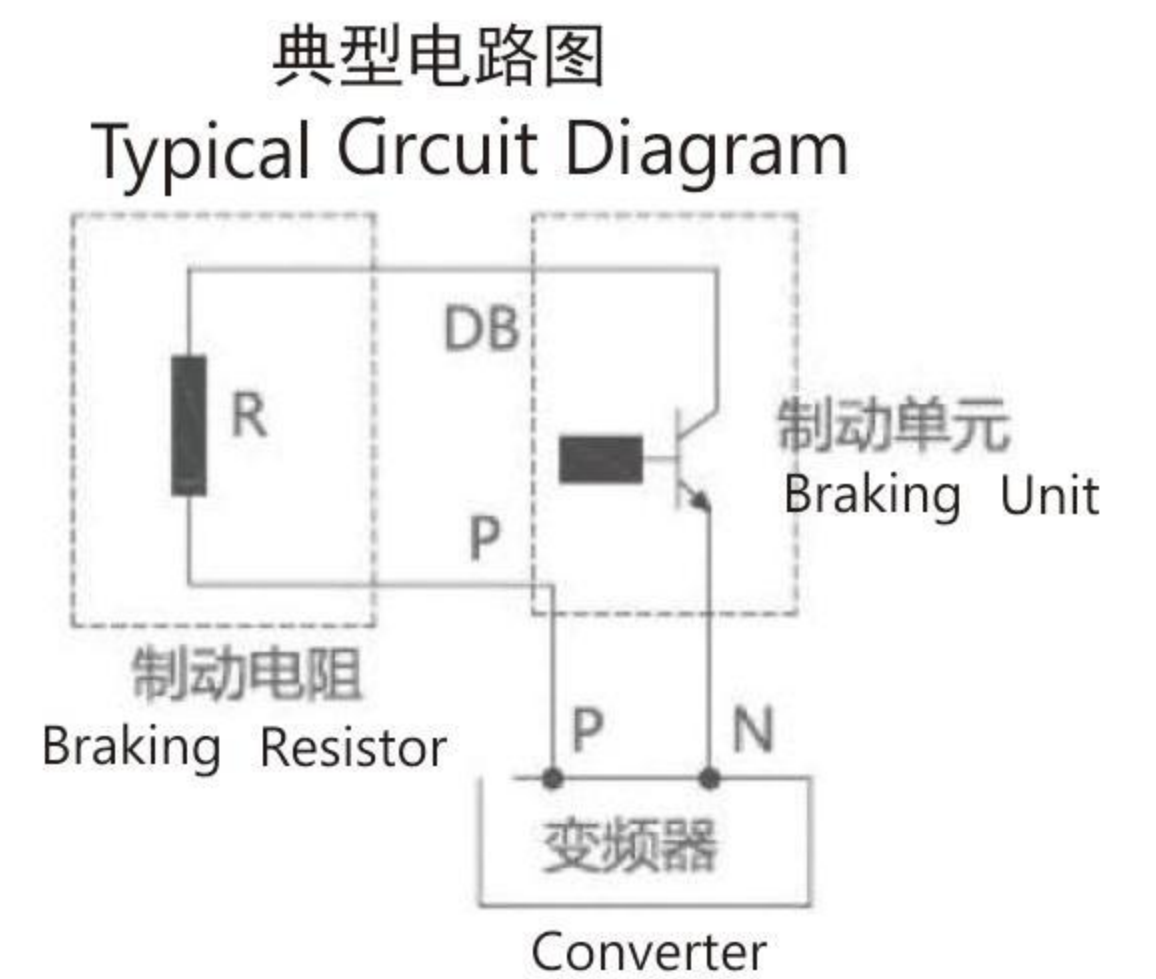

■ 产品尺寸图(Product Size)

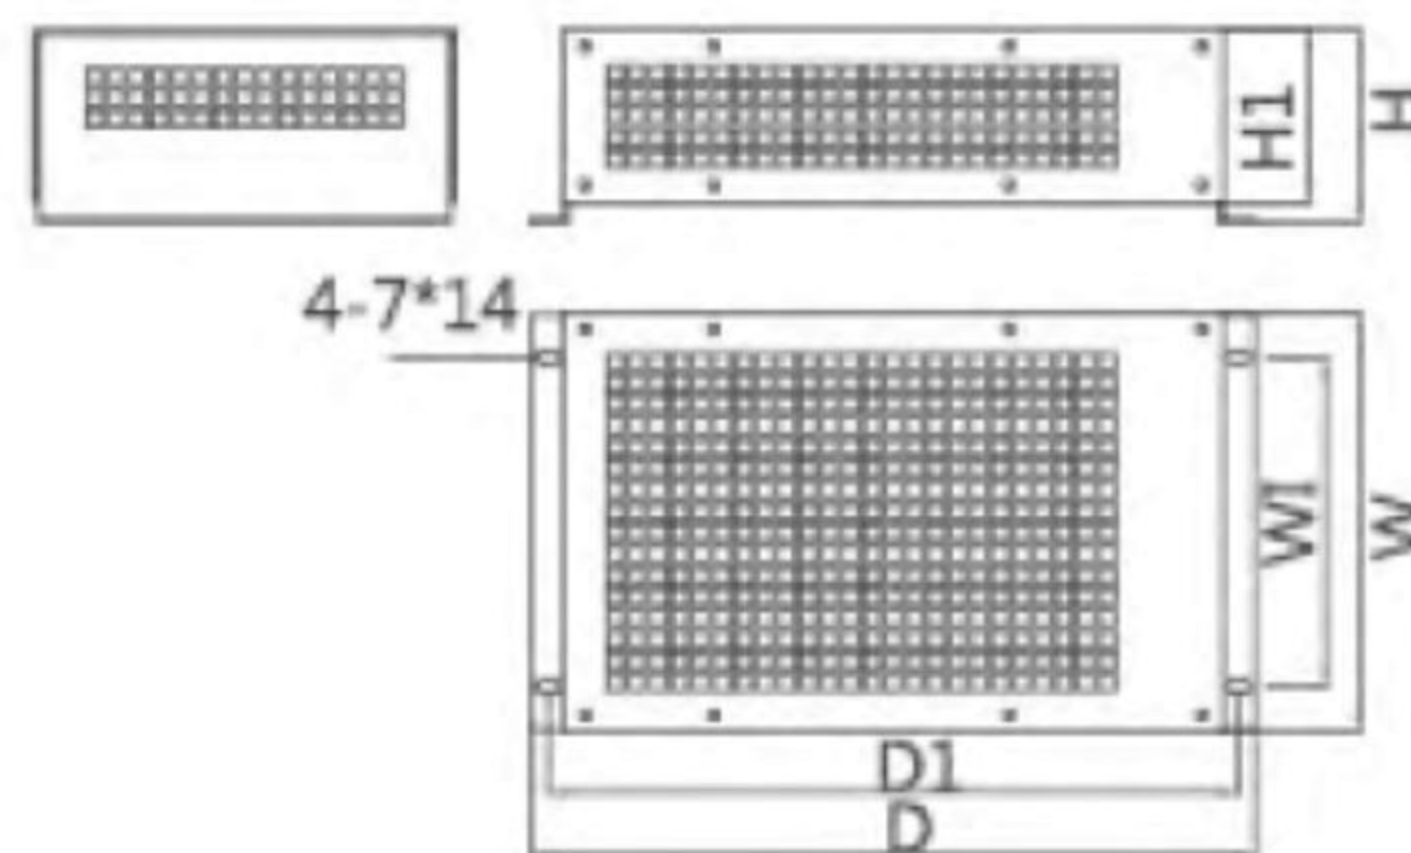

规格 Type	功率 (kW) Power	尺寸Dimension(±1mm)						安装孔 Mounting Hole
		D	D1	W	W1	H	H1	
JRA	1	440	420	225	200	117	105	7*14
JRA	2	440	420	225	200	117	105	7*14
JRA	3	440	420	225	200	117	105	7*14
JRA	4	440	420	225	200	177	165	7*14
JRA	6	440	420	225	200	195	183	7*14
JRA	8	440	420	225	200	255	243	7*14
JRA	10	440	420	225	200	357	345	7*14
JRA	12	440	420	225	200	357	345	7*14

备注:其他规格尺寸, 可根据用户要求制造。Remark: Customized if necessary.

■ 成品识别码(Product Identification Code)

JRA	1000W	40R	J
加热电阻箱 Aluminum Enclosure Resist or Assemblies	额定功率 Rated Power	电阻阻值 Resistance	阻值误差 Resistance Tolerance H=±3% J=±5% K=±10%